

BRG SHC3DIV C

BRIGHT Shower Range Bright Concealed Dual Control Valve + Diverter + Stopcock




Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:



WRAS Cert. Number: 1507041
WRAS Expiry Date: 31/07/2020




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Thermostatic
Shower Head Type:	None
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	80
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Preferably Balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Connection Inlet:	15mm compression connections
Connection Outlet:	Open
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

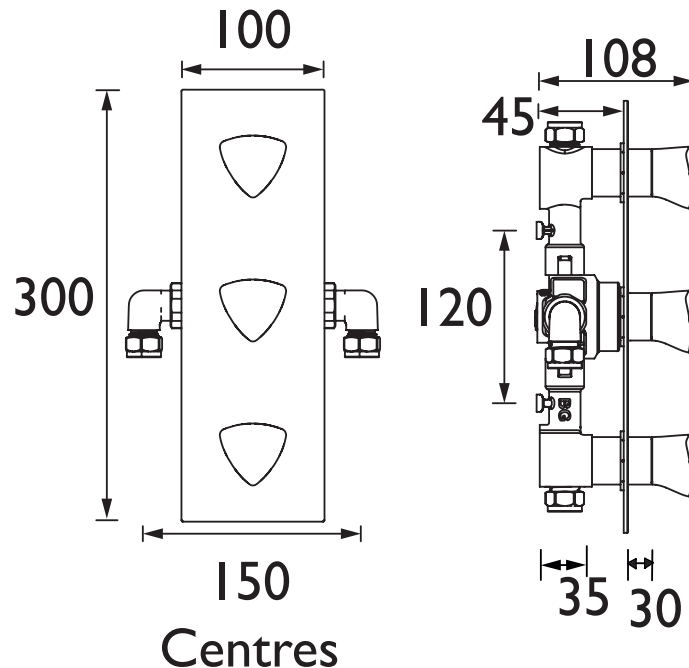

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 (CD Valve)	8.3	14.5	21.2	29.98	36.72	47.4
Outlet 2 (Diverter)	6.7	12.4	18.5	26.16	32.04	41.37
Outlet 3 (Diverter)	6.6	12.1	18	25.46	31.18	40.25

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3